
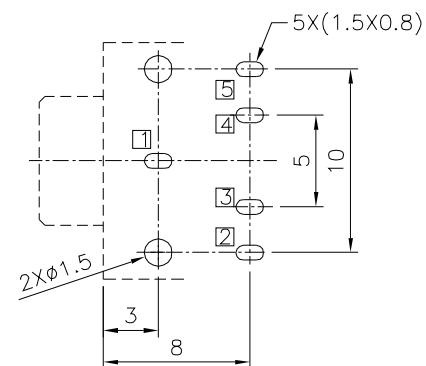
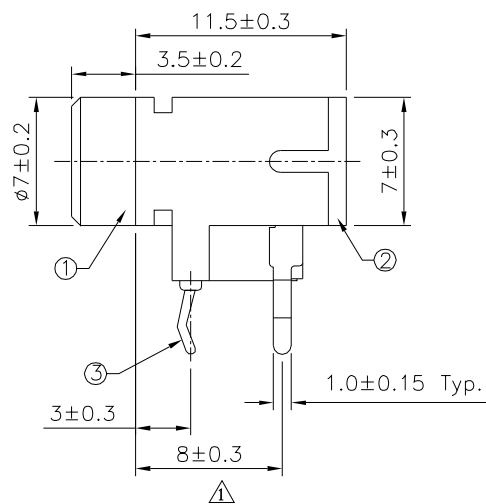
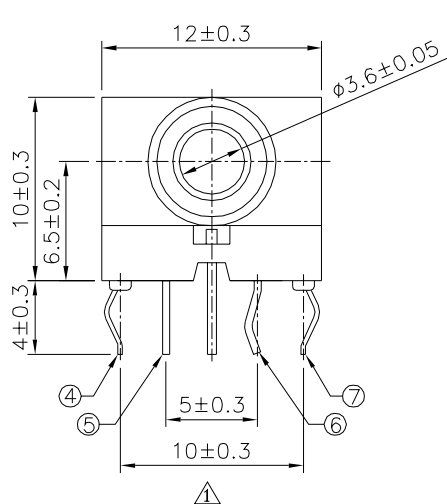
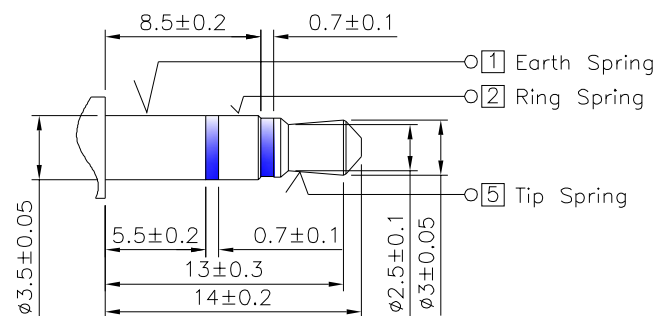
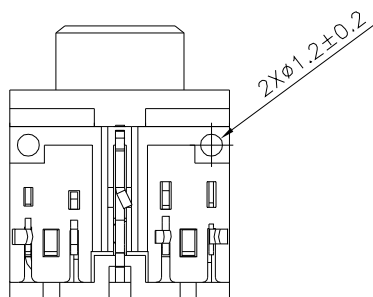


Recommended P.C.B. Layout
(Copper-Sided View)

Matching Plug



SPECIFICATION

Rating:30V 0.5A DC
Withstand Voltage:500V AC
Contact Resistance:50 Milliohms Max.
After Test:100 Milliohms Max.
Insulation Resistance:100 Megaohms Min. (500V DC)
After Test:50 Megaohms Min.
Operation Temperature Range:-20°C~+70°C
RoHS Compliant

No.	Description	Q'ty	Material	Remark
①	Housing	1	PBT	Black
②	Cover	1	PBT	Black
③	Earth Terminal	1	Phosphor Bronze	Tin Plated
④	Ring Spring	1	Stainless Steel	Tin Plated
⑤	Shunt Terminal	1	Brass	Tin Plated
⑥	Shunt Terminal	1	Brass	Tin Plated
⑦	Tip Spring	1	Stainless Steel	Tin Plated

□ :Terminal No. ○ :Item No.

Stereo Audio Socket 3.5mm 5 Pins
<https://www.sunrom.com/m/7473>

DRAWING No.

7473

APPROVED BY

ME

CHECKED BY

HZ

DRAWING BY


CY

SCALE

NONE

REV.

B1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES AREX. ±0.3
.X ±0.3
ANG. ±2°UNIT
mm

NO.	REV.	REVISIONS	CHK	DATE
①	B1	Modify Data	HZ	09/14/2023
②	B0	NEW RELEASE	HZ	12/20/2020