

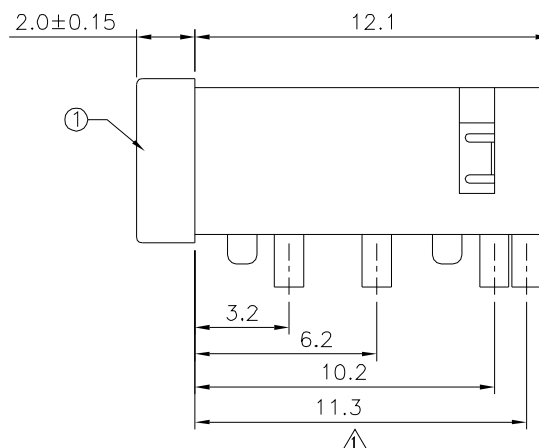
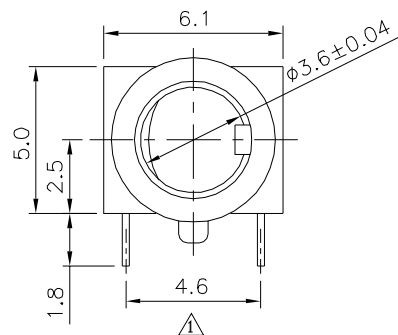


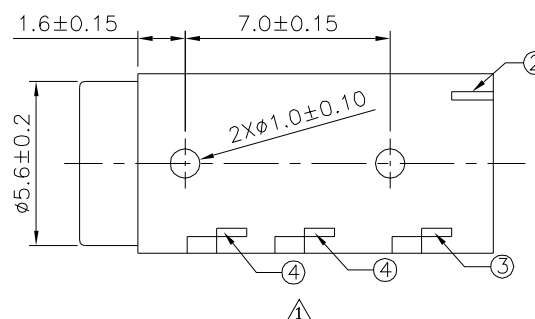


△ SPECIFICATION

Rating:30V 0.5A DC
 Withstand Voltage:500V AC
 Contact Resistance:50 Milliohms Max.
 After Test:100 Milliohms Max.
 Insulation Resistance:100 Megaohms Min. (500V DC)
 After Test:50 Megaohms Min.
 Insertion And Extraction Force:3~30N
 Life Test:5000 Cycles Min.
 Operation Temperature Range:-20°C~+70°C
 Storage Temperature Range:-40°C~+85°C
 RoHS Compliant

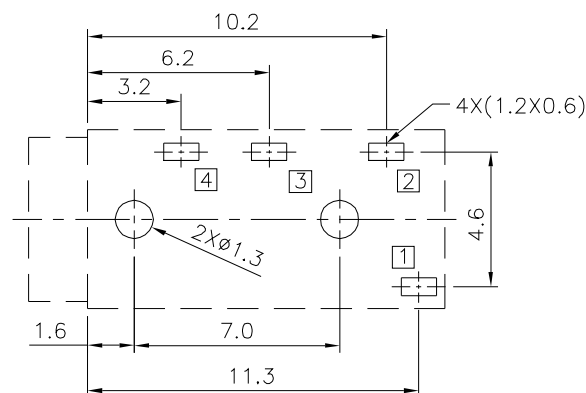

△ Recommended P.C.B. Layout(Top View)

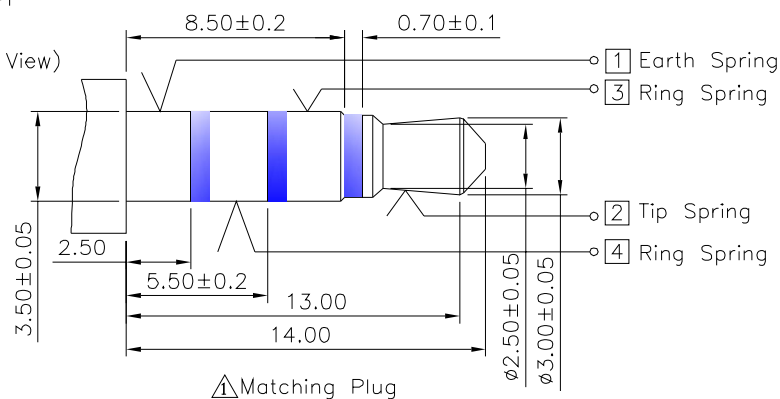


△

No.	Description	Q'ty	Material	Remark
①	Housing	1	PBT	Black
②	Earth Spring	① 1	Stainless Steel	Silver Plated
③	Tip Spring	② 1	Phosphor Bronze	Silver Plated
④	Ring Spring	③ ④ 2	Phosphor Bronze	Silver Plated

△

□ :Terminal No. ○ :Item No.

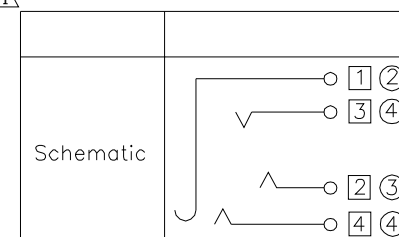

**Stereo Socket 3.5mm PCB Mount
Through Hole**
<https://www.sunrom.com/m/7472>

DRAWING No. △

7472

APPROVED BY ME

CHECKED BY HZ

DRAWING BY GA

SCALE


NONE

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
 X. ±0.3
 .X ±0.3
 .XX ±0.3
 ANG. ±2°

UNIT
mm



△ A1

Modify Data

HZ

06/21/2013

△ A0

NEW RELEASE

EC

01/05/2005

NO. REV.

REVISIONS

CHK

DATE