

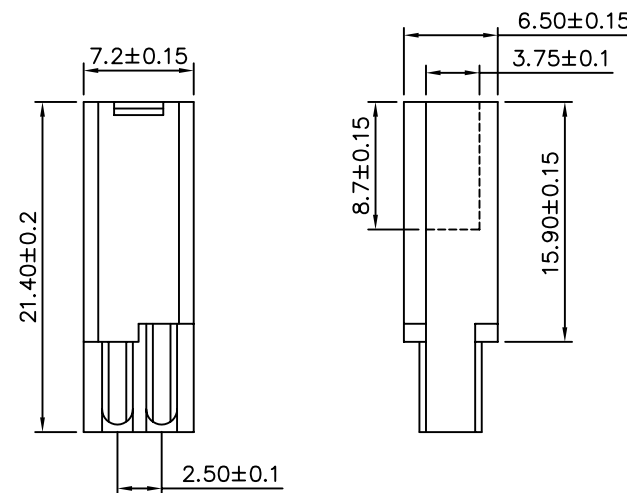
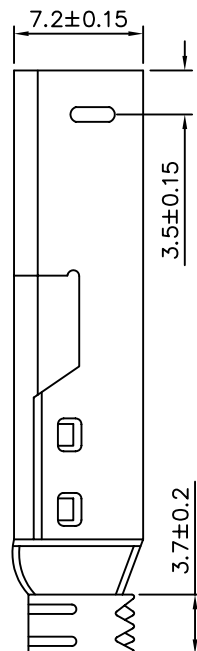


SPECIFICATIONS

Current Rating: 1A Max.
 Dielectric Withstanding Voltage: 500V(AC) For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min. At DC 500V
 Total Mating Force: 4.0Kgf Max.
 Total Unmating Force: 1.0Kgf Min.
 Temperature Range: -55°C~+105°C
 Insulator: PBT,UL 94V-0
 Contact: Copper Alloy,t=0.20mm,Gold Flash
 Shell: Cold Rolled Steel,t=0.30mm,Nickel Plated

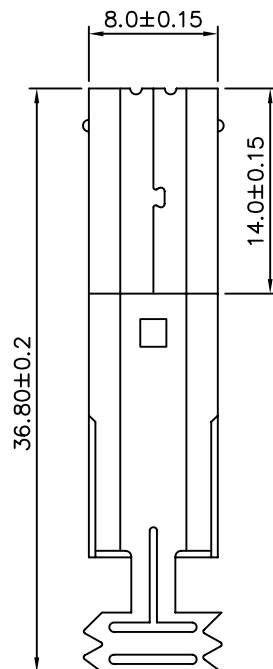

USB B-Type Plug Male - 4 pin
 DIY Wire Solder

<https://www.sunrom.com/m/7179>

DRAWING No.

7179

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY


HZF

UNLESS OTHERWISE
 SPECIFIED

TOLERANCES ARE
 .X ±0.3
 .XX ±0.20
 .XXX ±0.100
 ANG. ±1°

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

1	A1	Modify Data	BECKY	06/07/2005
2	A0	NEW RELEASE	RAN	