

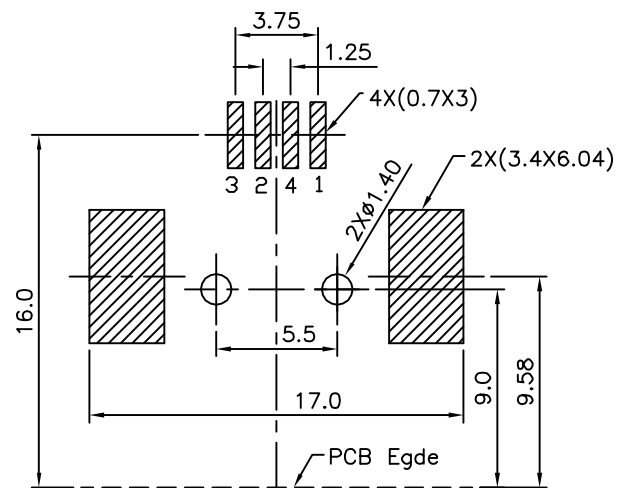
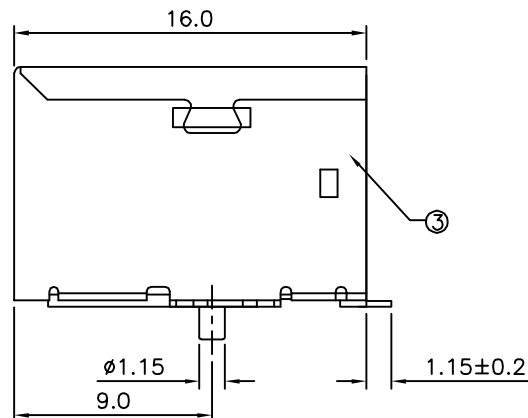


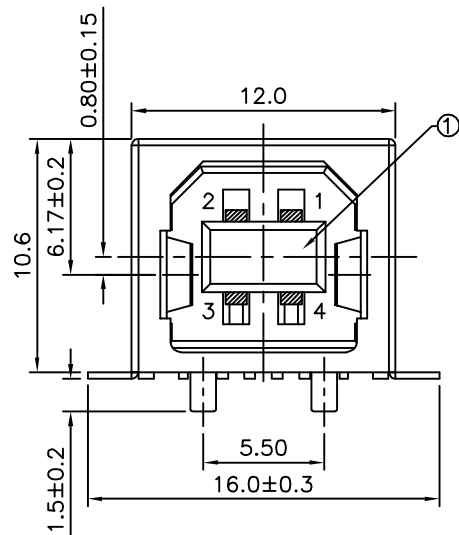

Recommended P.C.B. Layout
(Component Side)

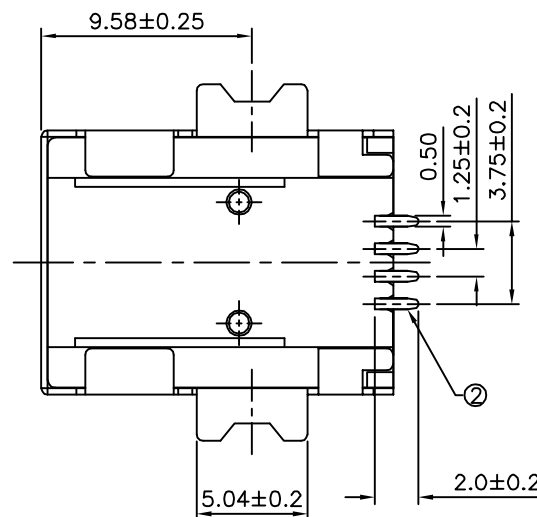

SPECIFICATION

Rated Voltage And Current:1.5A At 250V AC Min.
 ⚠ Withstand Voltage:750V AC(RMS) For 1 Minute(Rev. 1.1)
 500V AC(RMS) For 1 Minute(Rev. 2.0)
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Durability(Life Test):1500 Cycles
 Insertion Force:35N Max.
 Extraction Force:10N Min.
 RoHS Compliant

No.	Name	Material	Q'ty	Remark
1	Housing	PA9T+G.F.	1	Black
2	Terminal	Phosphor Bronze	4	Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel
3	Shell	Brass	1	Nickel Plated

USB B-Type Female SMD Right Angle
<https://www.sunrom.com/m/7273>

DRAWING No.

7273

APPROVED BY

EM

CHECKED BY

HZ

DRAWING BY

SO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.38
.X ±0.25
.XX ±0.13
.XXX ±0.05

SCALE

NONE

REV.

A1

UNIT

mm



NO. REV.

REVISIONS

CH

DATE

⚠ A1

Modify Spec.

HZ

06/26/2014

⚠ A0

NEW RELEASE

HZ

11/15/2011