
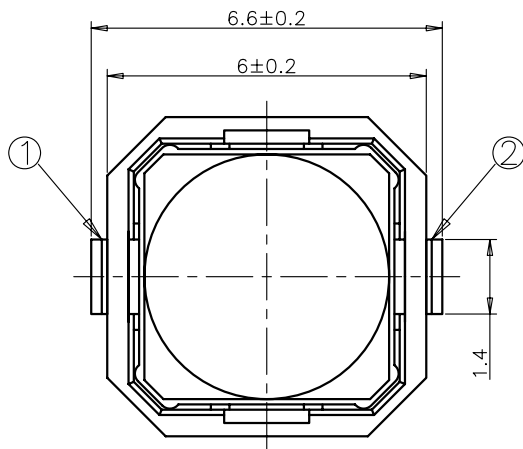
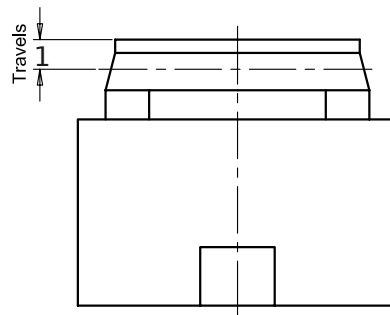


Specifications

Rating	DC 12V/50mA	
Contact Resistance	100mΩ max.	
Insulation resistance	DC100V 60S 100MΩ min.	
Dielectric strength	AC250V (50~60HZ) 60S min.	
Operation force	≤180±30gf	≥250±50gf
Operating Life	100, 000cycles	100, 000cycles
Travels	1mm	

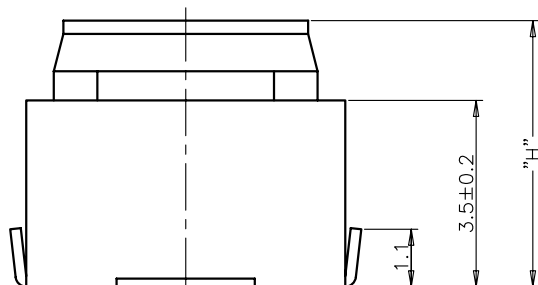

Silent Switch SMD 6x6mm
<https://www.sunrom.com/m/7530>

RoHS

5	COVER	1	LCP	BLACK
4	ACTUATOR	1	SILICONE	/
3	CONTACT	1	STAINLESS STEEL	Ag-PLATED
2	TERMINAL	2	BRASS	Ag-PLATED
1	HOUSING	1	LCP	BLACK
ITEM	PART NAME	QUANTITY	MATERIAL	FINISH