

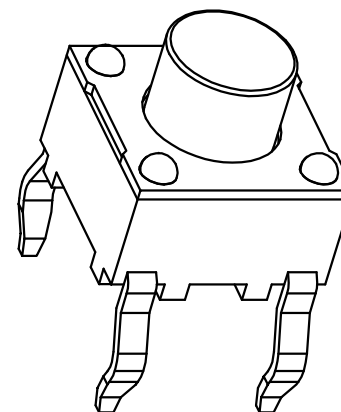
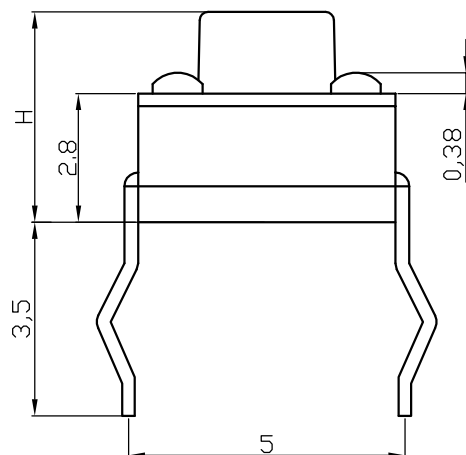
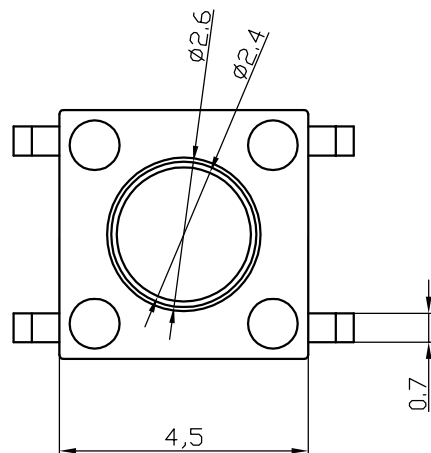


SCHEMATIC



Recommended P.C.B Layout

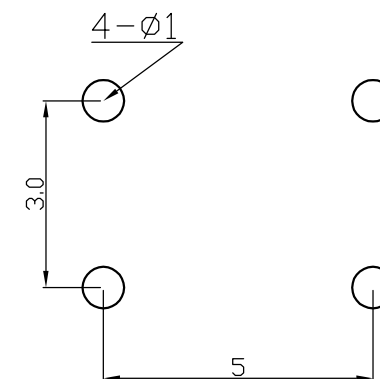

1 ELECTRICAL CHARACTERISTICS

1.1 Rating: DC12V 50mA

1.2 Travel: 0.25±0.1mm

1.3 Contact Resistance: 100mΩ Max

1.4 Life: 50,000 Cycles MIN

2 ELECTRICAL temperature rang: -25° C~+70° C

Height

3.8mm <https://www.sunrom.com/m/6421>

4.3mm <https://www.sunrom.com/m/7616>

5mm <https://www.sunrom.com/m/7617>

6mm <https://www.sunrom.com/m/7618>

7mm <https://www.sunrom.com/m/7619>

8mm <https://www.sunrom.com/m/7620>