


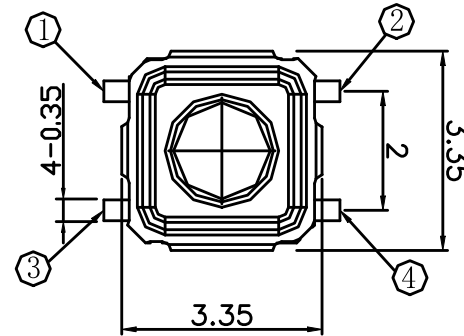


H
1.5



Schematic
PCB

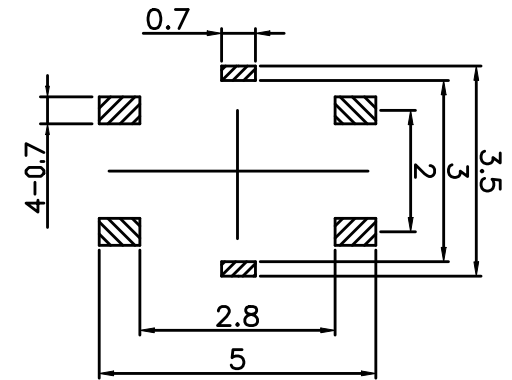

Rate voltage,current	50mA DC12V
Contact resistance	$\leq 100\text{m}\Omega$
Operating force	$160 \pm 50\text{gf}$
travel	$0.20 \pm 0.10\text{mm}$
Insulated resistance	$\geq 100\text{M}\Omega$
Dielectric strength	$\geq 250\text{VAC}/1\text{min}$
Endurance	≥ 100000

Tactile Switch SMD 4P 3x3x1.5mm
<https://www.sunrom.com/m/7615>