

1

2

3

4

A

A

B

B

C

C

D





D

E

E

F

F

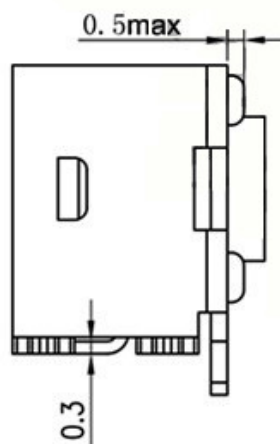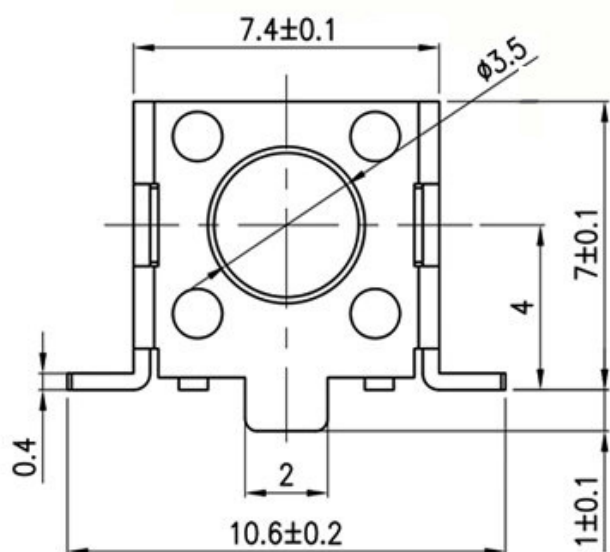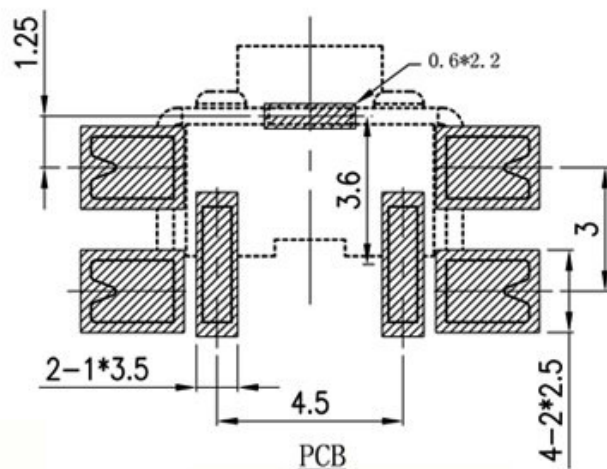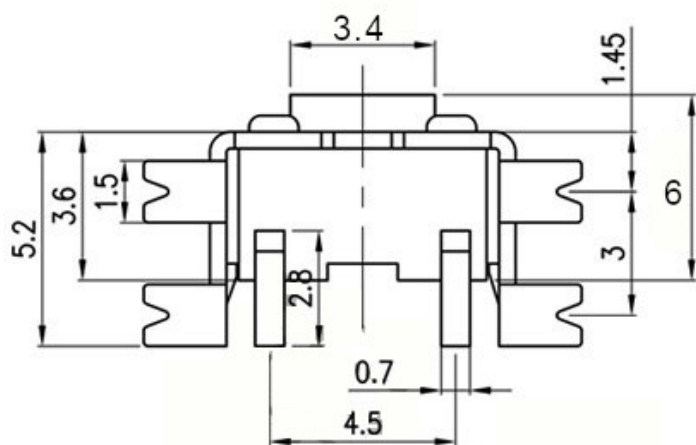

SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PRODUCT NAME

Tactile Switch SMD RA 6x6x6mm

SUNROM.COM

PRODUCT CODE
7682

PRODUCT URL
<https://www.sunrom.com/m/7682>

DATE
01/04/2025

1

4