

1

2

3

4

5

6

A

B

C


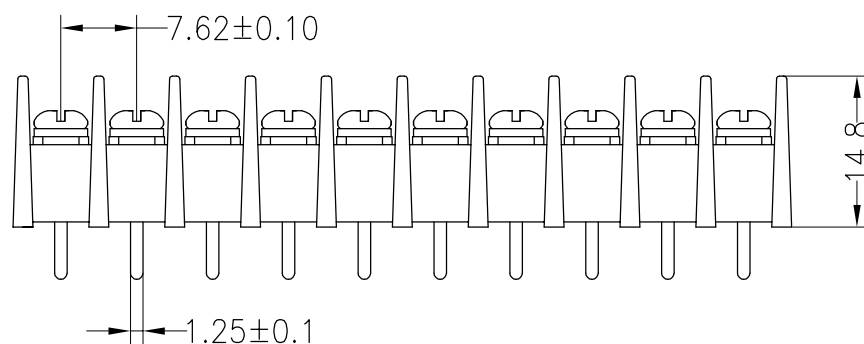
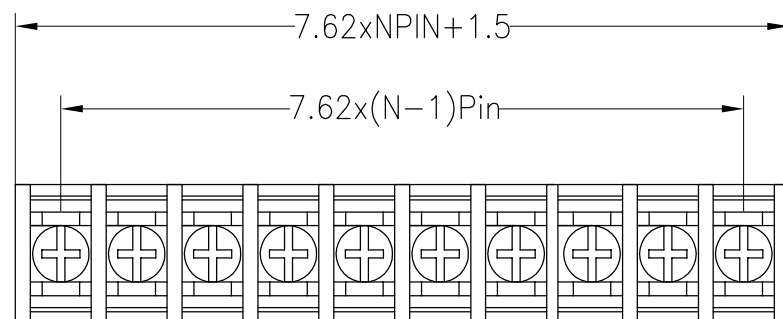
D

A

B

C

D

**HSF** RoHS  ^{us} 

SPECIFICATIONS

Rated : 300V,20A

Dielectric strength : AC2000V/1 Minute

Insulation Resistance : 1000MΩ Min

Contact Resistance : 20mΩ Max

Screw Torque : 0.5Nm (4.4Lb.in)

Wire Range : 14~22AWG

Temp. range : -40℃~+105℃

MAX Soldering : +250℃,5s

Housing Material : PA66 (UL94 V-0)

Contact : Brass, Tin plating

Screw : M3.0, Steel, Ni plating

PRODUCT NAME

Barrier Terminal Blocks 7.62mm

SUNROM.COM

PRODUCT URL

<https://www.sunrom.com/c/barrier-terminal-blocks>

DATE

08/05/2025

1

2

5

6