

1

2

3

4

5

6

A

A

B


B

C

C

D

D

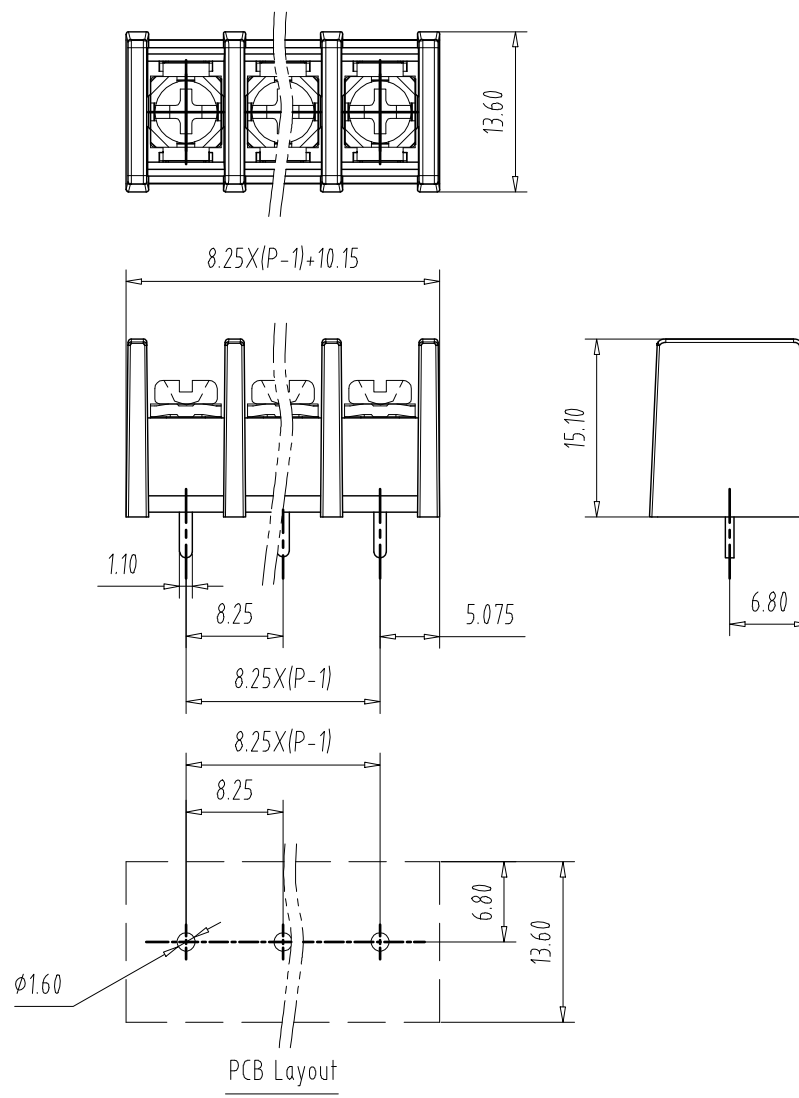

SPECIFICATIONS

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	20A	/	/
Rated Voltage	300V	/	/

2.Torque value: **M3, 4.43lb.in**

3.Wire range: 22~12AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	400V	/
Rate Current(A)	/	17.5A	/

2. Torque value: M3, 0.5Nm

3.wire range: 2.5mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Copper alloy(Sn Plated)

3.Screw: Steel(M3,Ni Plated)

NOTES3:

1.Pitch: **8.25mm** Poles: 02 ~24P

2.Stripping length: 8mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

PRODUCT NAME

Barrier Terminal Blocks 8.25mm

SUNROM.COM

PRODUCT URL

<https://www.sunrom.com/c/barrier-terminal-blocks>

DATE

08/05/2025

1

2

5

6