

1

2


3

4

5

6




**HSF** RoHS c  **CE**

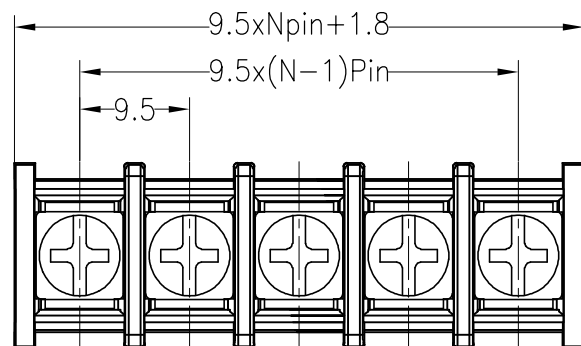

#### SPECIFICATIONS

Rated : 300V, 20A  
 Dielectric strength : AC2000V/1 Minute  
 Insulation Resistance : 1000MΩ Min  
 Contact Resistance : 20mΩ Max  
 Screw Torque : 1.2Nm (10.53Lb.in)  
 Wire Range : 12~22AWG  
 Temp. range : -40°C ~ +105°C  
 MAX Soldering : +250°C, 5s

Housing Material : PA66 (UL94 V-0)  
 Contact : Brass, Tin plating  
 Screw : M4.0, Steel, Ni plating

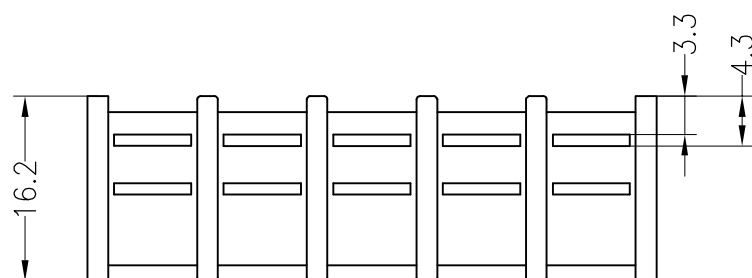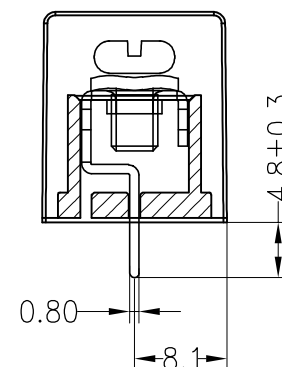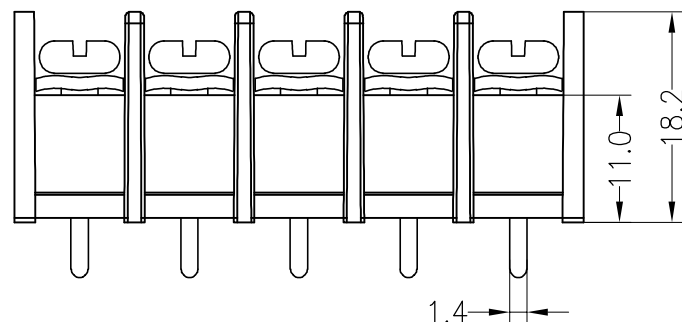

PRODUCT NAME

Barrier Terminal Blocks 9.5mm

**SUNROM.COM**

PRODUCT URL

<https://www.sunrom.com/c/barrier-terminal-blocks>

DATE

08/05/2025

1

2

5

6