

1

2





3

4

5

6

HSF RoHS  ^{us} 

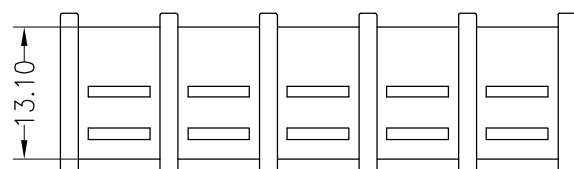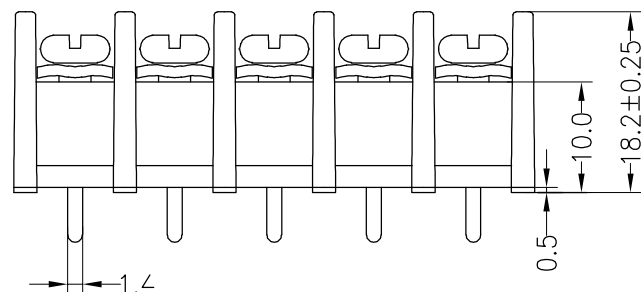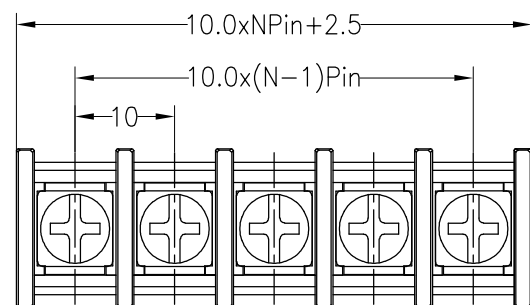

SPECIFICATIONS

Rated : 300V,30A
 Dielectric strength : AC2000V/1 Minute
 Insulation Resistance : 5000MΩ Min
 Contact Resistance : 20mΩ Max
 Screw Torque : 1.2Nm (10.53Lb.in)
 Wire Range : 12~22AWG
 Temp. range : -40℃~+105℃
 MAX Soldering : +260℃,5s

Housing Material : PA66 (UL94 V-0)
 Contact : Brass, Tin plating
 Screw : M4.0, Steel, Ni plating

PRODUCT NAME

Barrier Terminal Blocks 10mm

SUNROM.COM

PRODUCT URL

<https://www.sunrom.com/c/barrier-terminal-blocks>

DATE

08/05/2025

1

2

5

6