

1

2

3

4

5





6

A

B

C

D

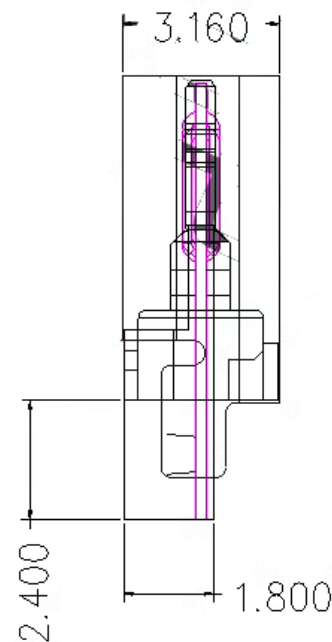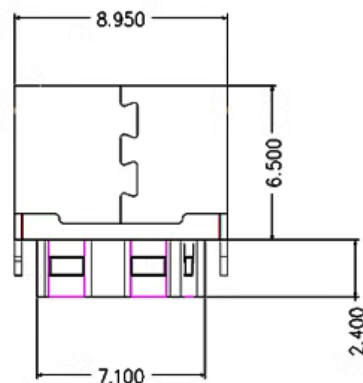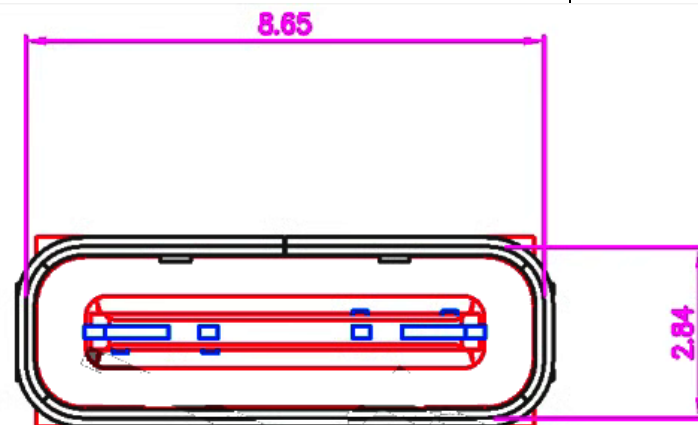

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA.100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS201-H,T=0.25±0.03mm
50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 3000~5000 CYCLES

3.ELECTRICAL:

CURRENT: 3A FOR VBUS:
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

PRODUCT NAME

SUNROM.COM

USB Type-C 2P wire solder points for power only

PRODUCT CODE

7656

PRODUCT URL

<https://www.sunrom.com/m/7656>

DATE

01/04/2025

1

2

5

6