



SPECIFICATION


Contact Rating: 50mA,12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100mΩ min.500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.25mm
Operating Temp: -30℃~+85℃
Storage Temp: -30℃~+80℃

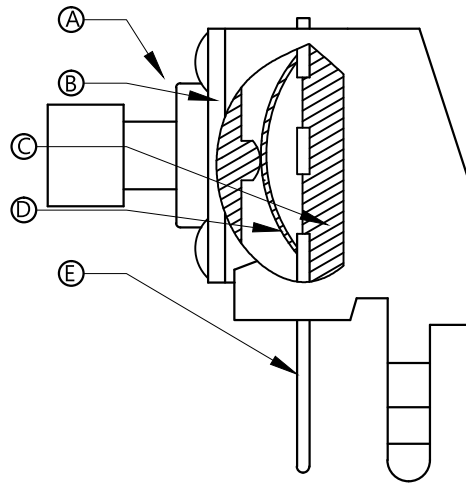



NO.	Name	Number	Qty	Materil	Remarks
⑤	Terminal	2		Brass	Silvering
④	Contact	1		Phosphorus copper	Silver covered
③	Base	1		PPA	Black
②	Cover	1		SPCC	Nickel Plating
①	Knob	1		PPA	Black

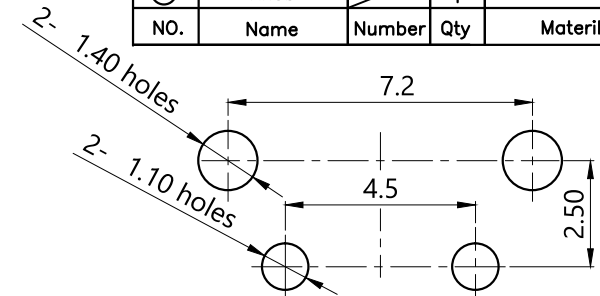

PCB Layout(Pattern side)



Circuit Diagram

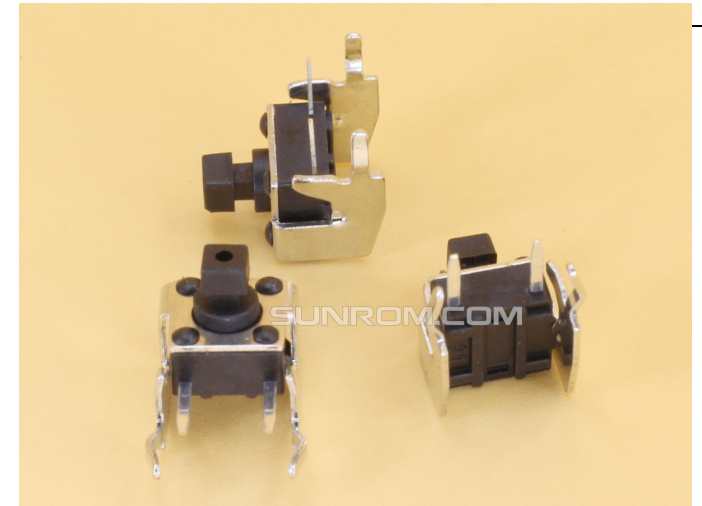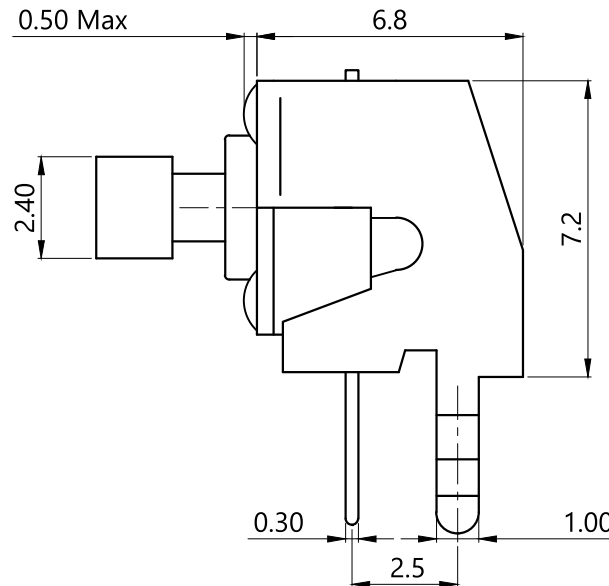

PRODUCT NAME

Tactile Switch 6x6x7.3mm RA 2P Square Head 2.4mm

SUNROM.COM

PRODUCT CODE

7684

PRODUCT URL

<https://www.sunrom.com/m/7684>

DATE

01/04/2025

RoHS