


RoHS

SPECIFICATION


Contact Rating: 50mA,12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100mΩ min.500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.25mm
Operating Temp: -30℃~+85℃
Storage Temp: -30℃~+80℃

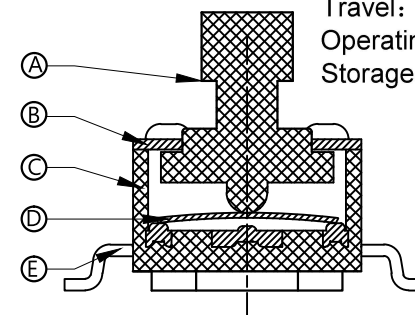



PCB Layout(Pattern side)

OPERATING FORCE 120±30gf

⑤	Terminal		4	Brass	Silvering
④	Reed		1	SUS	Silver covered
③	Base		1	PPA	Black
②	Cover		1	SPCC	Plating Cu Sn
①	Keystoke		1	PPA	Black
NO.	Name	Number	Qty	Materil	Remarks



Circuit Diagram

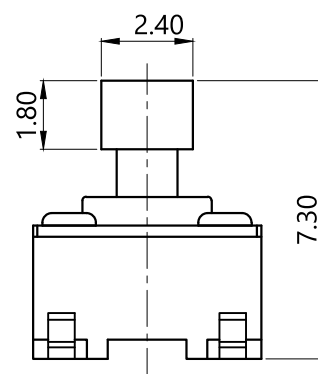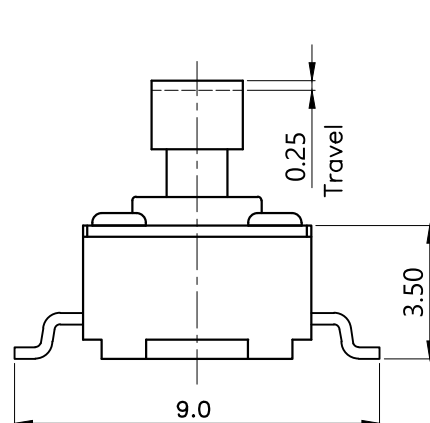

PRODUCT NAME

SUNROM.COM

Tactile Switch 6x6x7.3mm SMD 4P Square Head 2.4mm

PRODUCT CODE

7690

PRODUCT URL

<https://www.sunrom.com/m/7690>

DATE

01/04/2025