

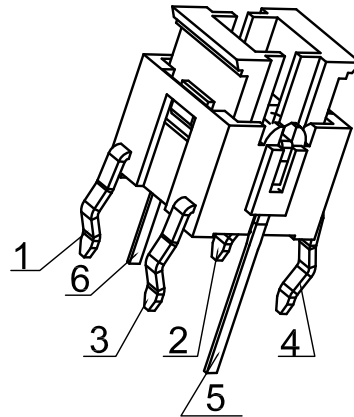



1 2 3 4 5 6

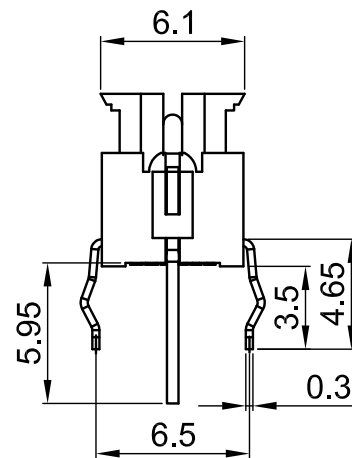


Specifications


Circuit	:SPST
Current rating	:50mA
Voltage rating	:12VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100m Ω Max. (Initial)
Insulation resistance	:100M Ω Min.
Operating force	:180 \pm 50gf
Total travel	:0.25mm \pm 0.1mm
Operating life	:100,000 cycles Min
Solder specifications	:260 $^{\circ}$ C for 5 seconds
Function	:Momentary
Operating temperature	:+10 $^{\circ}$ C ~ +60 $^{\circ}$ C

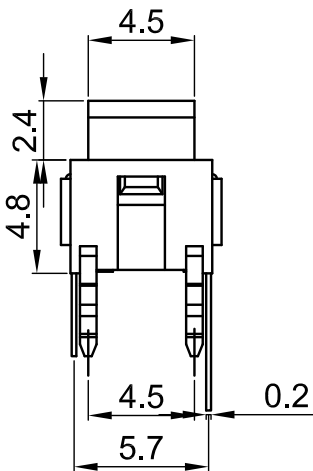

P.C.B. LAYOUT

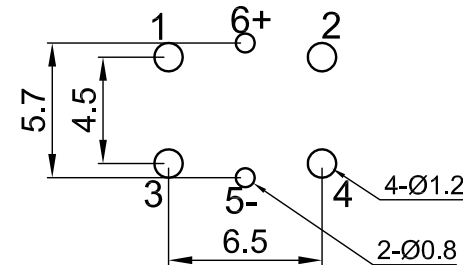

CIRCUIT



MATERIAL:

Base Frame: Nylon46, UL rated:94 V-2 Min. ;
Actuator: PA66, UL rated:94 V-2 Min. ;
Terminal: Brass, Silver or Tin plated .



PRODUCT NAME

Switch 6x6x7.2mm LED Through Hole

SUNROM.COM

PRODUCT URL

<https://www.sunrom.com/c/6x6x72mm-led>

DATE

01/09/2025

1 2 3 4 5 6