

1

2

3

4

5

6

A

B

C







D

A

B

C

D

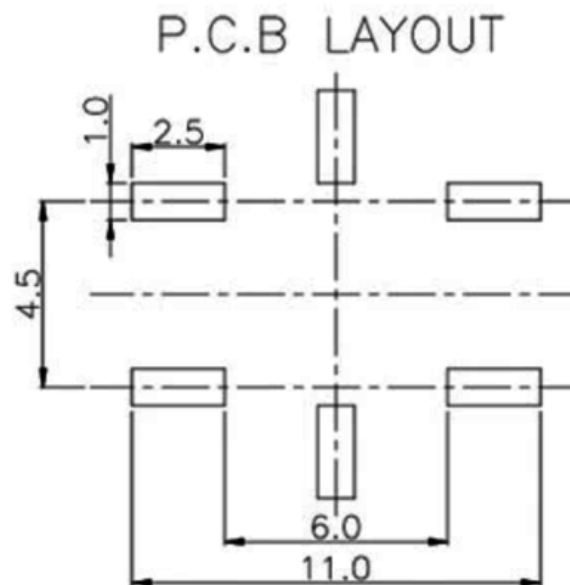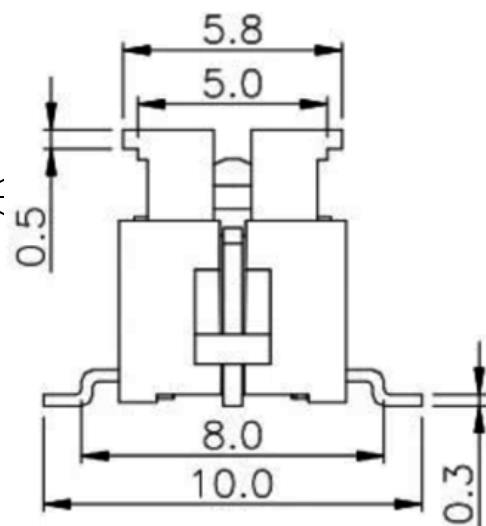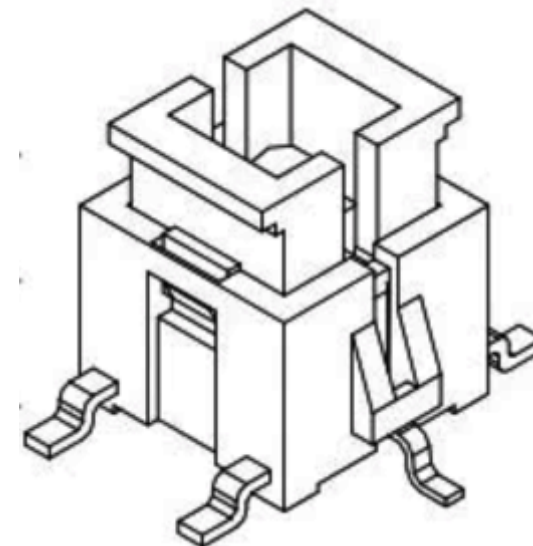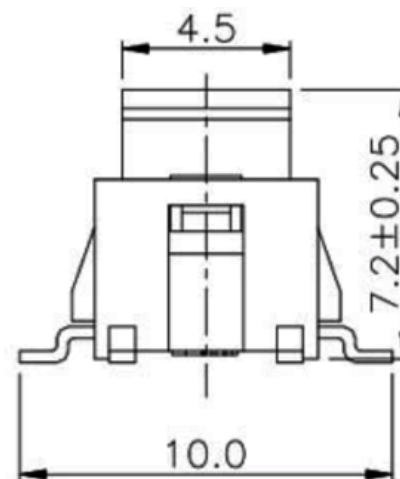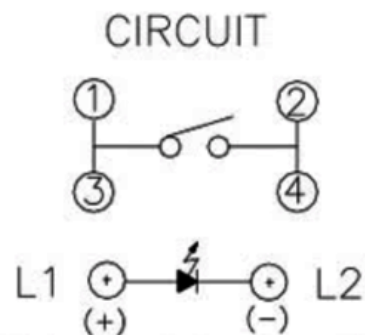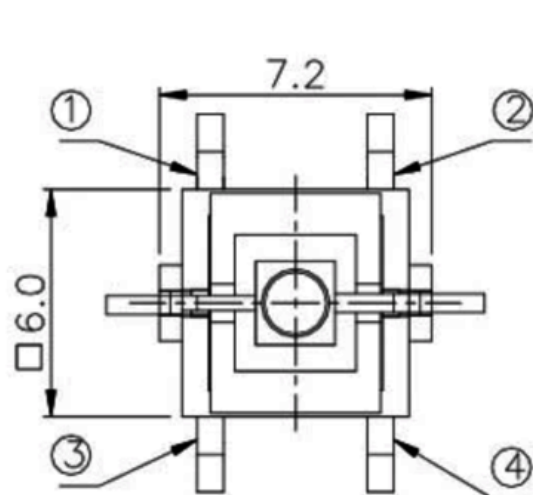

Specifications

Circuit	:SPST
Current rating	:50mA
Voltage rating	:12VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100mΩ Max. (Initial)
Insulation resistance	:100MΩ Min.
Operating force	:180±50gf
Total travel	:0.25mm±0.1mm
Operating life	:100,000 cycles Min
Solder specifications	:260° C for 5 seconds
Function	:Momentary
Operating temperature	:+10° C ~ +60° C

MATERIAL:

Base Frame: Nylon46, UL rated:94 V-2 Min. ;
 Actuator: PA66, UL rated:94 V-2 Min. ;
 Terminal: Brass, Silver or Tin plated .



PRODUCT NAME

Switch 6x6x7.2mm LED SMD

SUNROM.COM

PRODUCT URL

<https://www.sunrom.com/c/6x6x72mm-led>

DATE

01/09/2025

1

2

5

6