


## SMD JST XH 2.5MM TOP ENTRY HEADER

Suitable for reflow


### DIMENSIONS

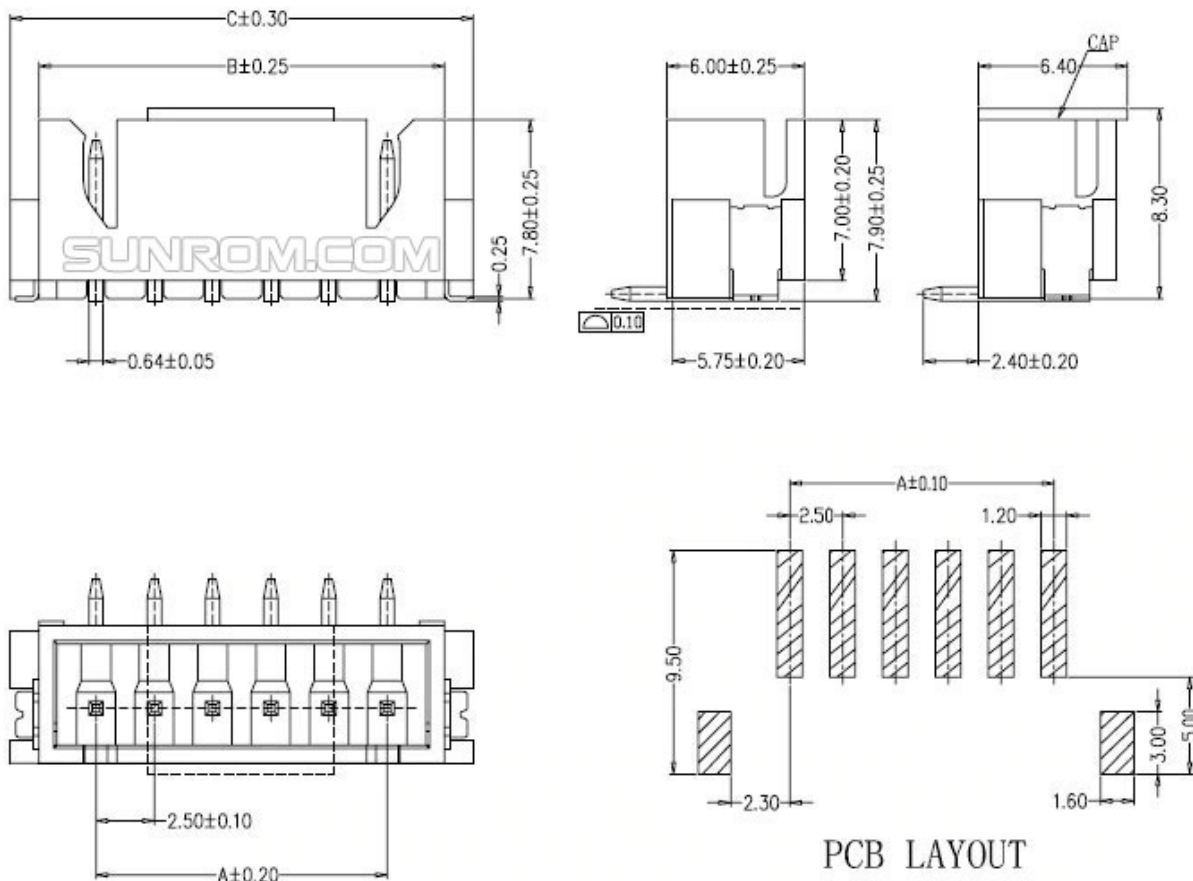

### SPECIFICATIONS

- 1、 Current Rating: 3A AC, DC
  - 2、 Voltage Rating: 250V AC, DC
  - 3、 Temperature Range: -25°C~+85°C
  - 4、 Contact Resistance: 20mΩ Max
  - 5、 Insulation Resistance: 1000MΩ Min
  - 6、 Withstanding Voltage: 1000V AC/minute
  - 7、 Material: Wafer LCP, PA6T, UL94V-0
- PIN Brass Tin-plated  
Solder pad Phosphoric bronze Tin-plated

	A	B	C
2P	2.50	7.50	10.00
3P	5.00	10.00	12.50
4P	7.50	12.50	15.00
5P	10.00	15.00	17.50
6P	12.50	17.50	20.00
7P	15.00	20.00	22.50
8P	17.50	22.50	25.00
9P	20.00	25.00	27.50
10P	22.50	27.50	30.00

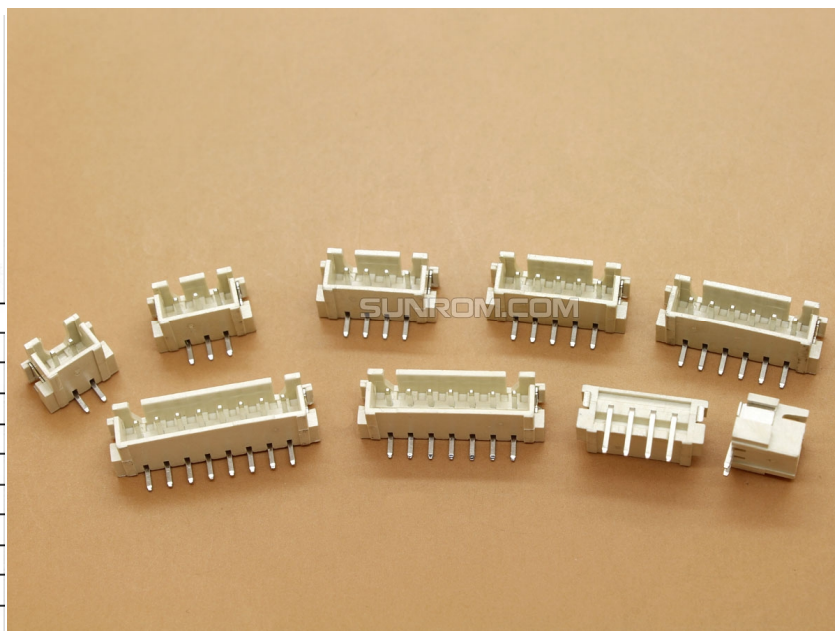

## ORDERING DETAILS

Sunrom Part#	Pins	Ordering Page
5608	2	<a href="http://www.sunrom.com/m/5608">http://www.sunrom.com/m/5608</a>
5609	3	<a href="http://www.sunrom.com/m/5609">http://www.sunrom.com/m/5609</a>
5610	4	<a href="http://www.sunrom.com/m/5610">http://www.sunrom.com/m/5610</a>
5611	5	<a href="http://www.sunrom.com/m/5611">http://www.sunrom.com/m/5611</a>
5612	6	<a href="http://www.sunrom.com/m/5612">http://www.sunrom.com/m/5612</a>
5613	7	<a href="http://www.sunrom.com/m/5613">http://www.sunrom.com/m/5613</a>
5614	8	<a href="http://www.sunrom.com/m/5614">http://www.sunrom.com/m/5614</a>