
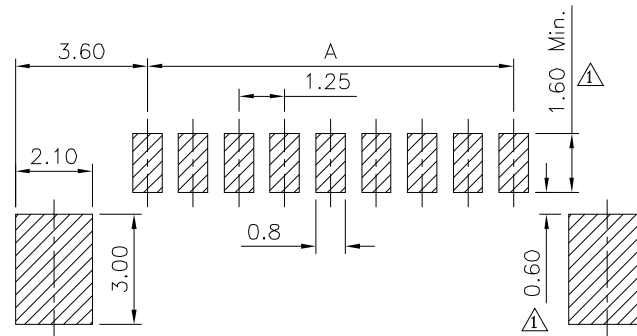
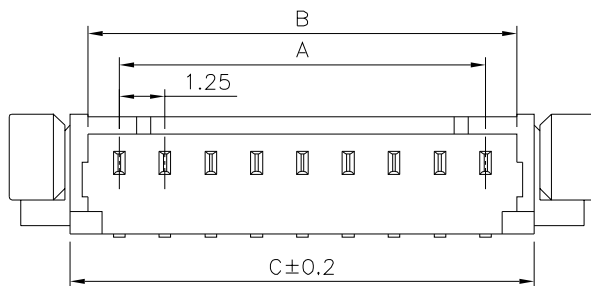
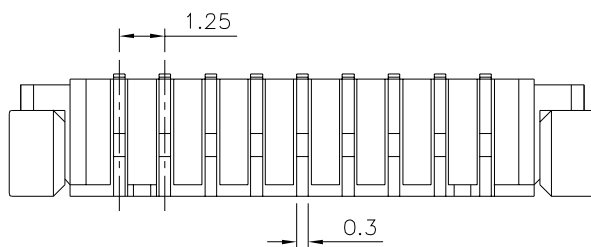



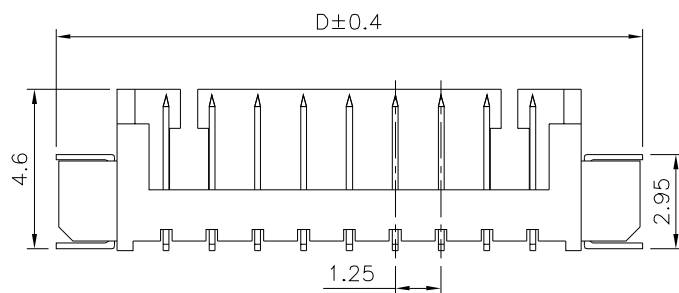

Recommended P.C.Board Layout

**3.1 SPECIFICATION**

Current Rating:1A AC/DC
Voltage Rating:125V AC/DC
Withstand Voltage:250V AC For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Operation Temperature:-40°C~+85°C
Insulator:HTN(UL94V-0),Nature
Contact:Phosphor Bronze,Tin Plated Over Nickel
Tab:Brass,Tin Plated Over Nickel
RoHS Compliant

Pin	A	B	C	D
2	1.25	3.05	4.25	7.65
3	2.50	4.30	5.50	8.90
4	3.75	5.55	6.75	10.15
5	5.00	6.80	8.00	11.40
6	6.25	8.05	9.25	12.65
7	7.50	9.30	10.50	13.90
8	8.75	10.56	11.75	15.15
9	10.00	11.80	13.00	16.40
10	11.25	13.05	14.25	17.65
11	12.50	14.30	15.50	18.90
12	13.75	15.55	16.75	20.15
13	15.00	16.80	18.00	21.40
14	16.25	18.05	19.25	22.65
15	17.50	19.30	20.50	23.90

<https://www.sunrom.com/c/jst-125mm>

sunrom electronics

DRAWING No. 3.1

APPROVED BY

HZF

CHECKED BY

HZF

DRAWING BY

CYP


SCALE

NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ .X ±0.25
△ .XX ±0.15
ANG.

UNIT
mm

NO. REV.

REVISIONS

CHK

DATE

3.1 A3 Modify Data

3.2 A2 Modify Data

3.3 A1 Modify Data

3.4 A0 NEW RELEASE

HZF

HZF

HZF

SHIN

12/31/2014

04/09/2012

11/10/2011

01/10/2007