

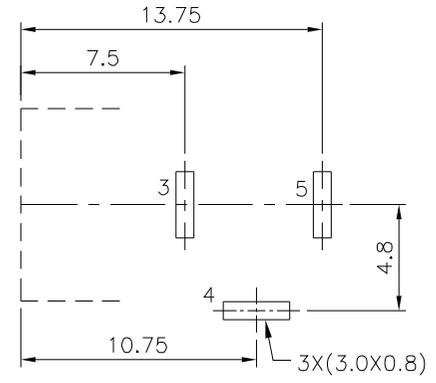
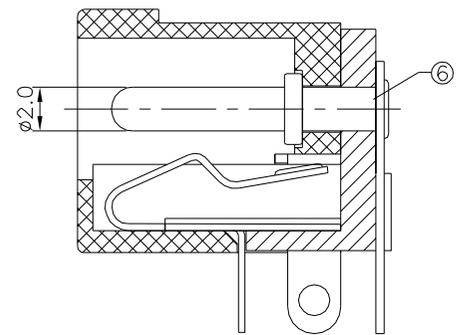
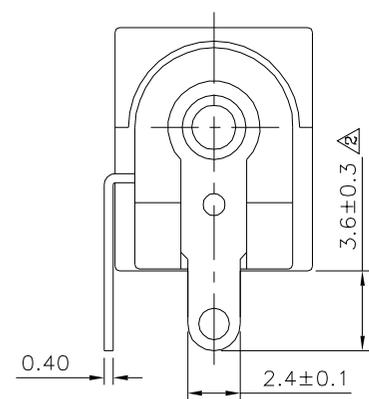
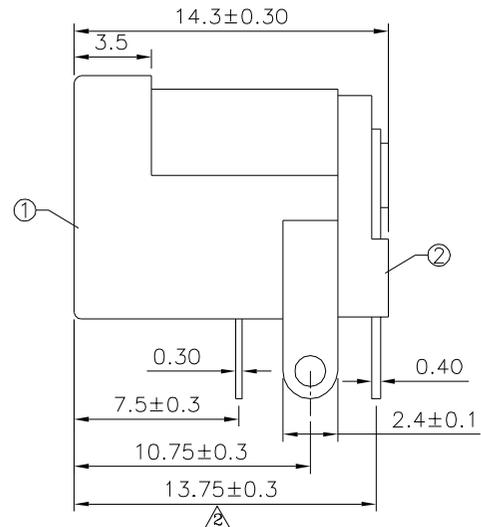
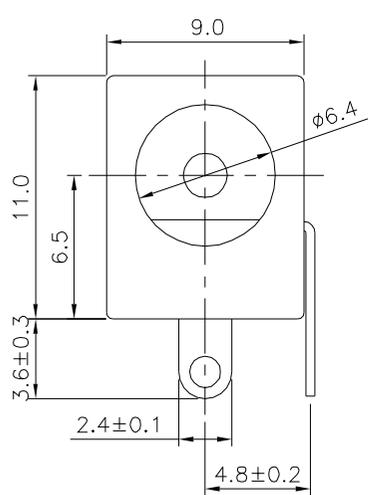



**SPECIFICATION**

Rating:DC 30V 5.0A  
 Withstanding Voltage:500V AC  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min. (DC 250V)  
 Insertion And Extraction Force:3~20N  
 Life Test:5000 Cycles  
 RoHS Compliant

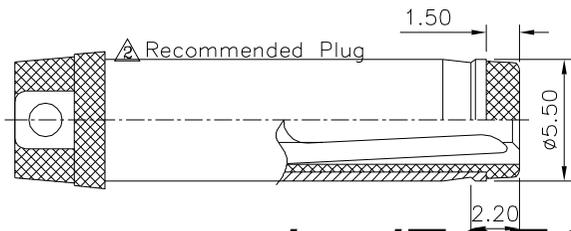

Recommended P.C.B. Layout(Top View)

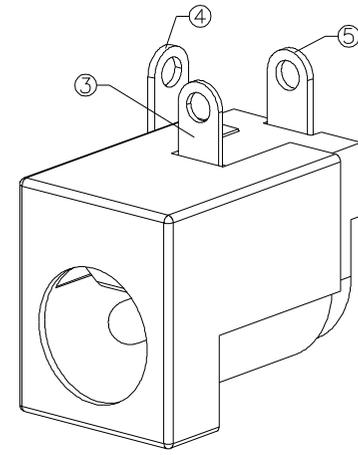

No.	Description	Q'ty	Material	Remark
①	Housing	1	LCP	Black
②	Cover	1	LCP	Black
③	Spring Piece	1	Bronze	Tin Plated
④	Curve Piece	1	Brass	Tin Plated
⑤	Flat Foot	1	Brass	Tin Plated
⑥	Pin	1	Brass	Nickel Plated

<https://www.sunrom.com/m/7070>

DRAWING No. $\Delta$		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X $\pm 0.15$ .XX $\pm 0.15$ ANG. $\pm 1.5^\circ$
		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
$\Delta$	A2	Modify Data	HZF	10/23/2019
$\Delta$	A1	Modify Data	HZF	10/30/2018
$\Delta$	A0	NEW RELEASE	HZF	04/11/2013