

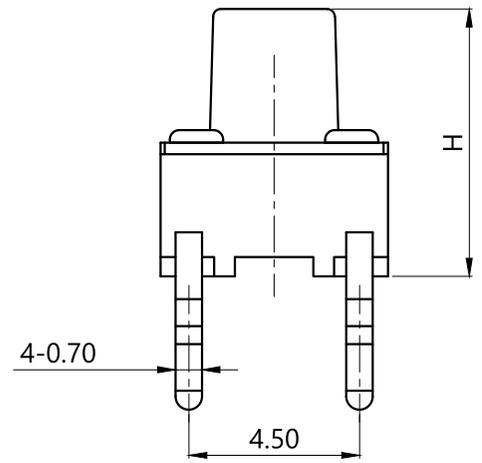
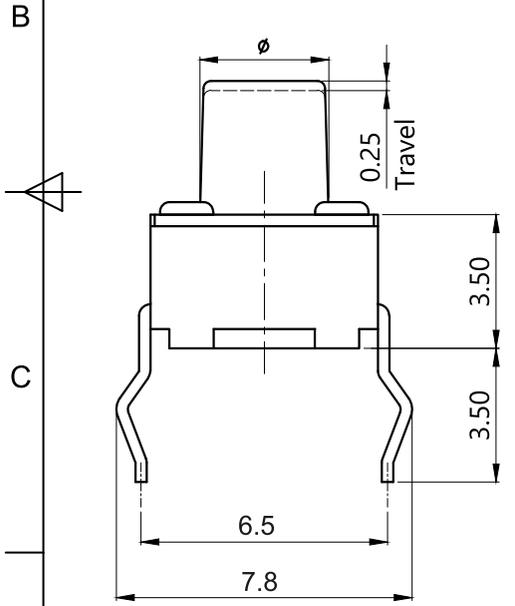


PCB Layout(Pattern side)

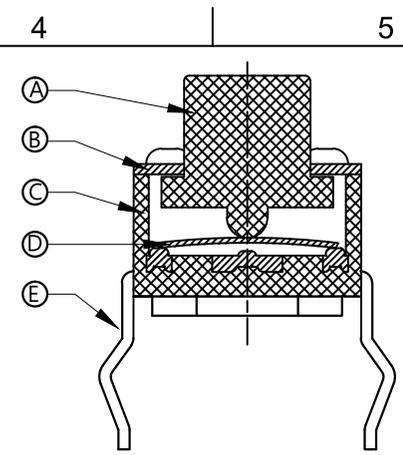

Circuit Diagram

TOTAL HEIGHT				
H	∅		H	∅
4.3	3.5		10	3.1
4.5	3.5		11	3.0
5.0	3.5		12	3.0
5.5	3.5		13	3.0
6.0	3.5		14	3.0
6.5	3.3		15	3.0
7.0	3.3		16	3.0
7.5	3.3		17	3.0
8.0	3.3		18	2.9
8.5	3.3		19	2.9
9.0	3.1		20	2.9
9.5	3.1		21	2.9

Till 30H = 2.9

SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min.500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30°C~+85°C
 Storage Temp: -30°C~+80°C

NO.	Name	Number	Qty	Materil	Remarks
⑤	Terminal	4		Brass	Silvering
④	Reed	1		Phosphorus copper	Silver covered
③	Base	1		PPA	Black
②	Cover	1		SPCC	Nickel Plating
①	Keystoke	1		PPA	Black

PRODUCT NAME
Tactile Switch 6x6mm 4P Through Hole



PRODUCT URL
<https://www.sunrom.com/c/6x6mm-size>

DATE
 01/04/2025