


SCREW TERMINAL 9.5MM WITH COVER

Board to Wire, PCB Mount, 300V 30V Rating



DIMENSIONS

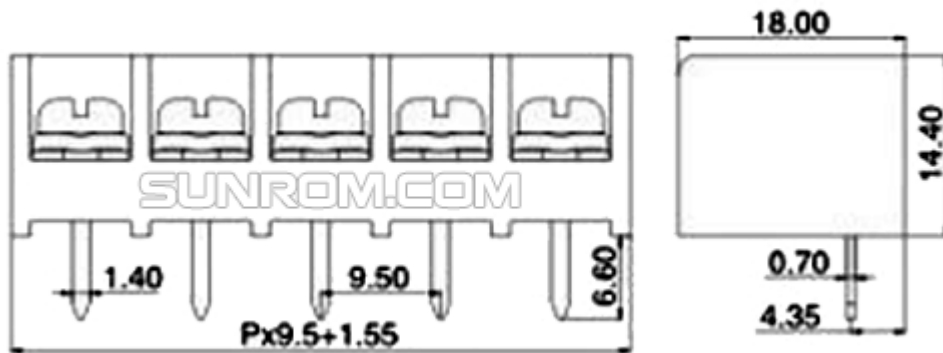

SPECIFICATIONS

Product Name	Screw Terminal
Pitch	9.5mm
Color	Black
Torque	0.2Nm
Strip Length	6mm
Rated Voltage	300V
Rated Current	30A
Insulation Resistance	500M Ohm/1000V
Contact Resistance	20 milliohm
Withstanding Voltage	2000V/1min
Wire Range	22~12 AWG
Screw	M4 Steel, Ni plated
Terminal	Brass, Tin Plated
Housing	PA66, UL94V-0
Temperature	-40 degC to +105 degC
Max Torque Value	10 kg.cm

ORDERING DETAILS

Sunrom Part#	Pole	Ordering Page
5097	2P	http://www.sunrom.com/m/5097
5098	3P	http://www.sunrom.com/m/5098
6240	4P	http://www.sunrom.com/m/6240
6241	5P	http://www.sunrom.com/m/6241
6242	6P	http://www.sunrom.com/m/6242
6243	7P	http://www.sunrom.com/m/6243
6244	8P	http://www.sunrom.com/m/6244
6245	9P	http://www.sunrom.com/m/6245
6246	10P	http://www.sunrom.com/m/6246